



Well pump 3SAm

Product advantages

- Optimised new design and improved efficiency
- Easy installation due to low weight and better transport
- Mechanical seal ensures pump reliability
- Compact design and thus space saving enables wide range of application
- The value is characterized by a stainless steel pump housing as well as by the brass connection threads
- External thermal protection against motor overload

Technical data

3SAm | **1.8/27-0.75** | **1.8/33-1.1** | **2.5/25-1.1**

Max. head (mH ₂ O)	115	142	104
Max. Flow (m ³ /h)	2.7	2.7	3.6
Power P2 (kW)	0.75	1.1	1.1
Supply voltage	1x230V, 50Hz	1x230V, 50Hz	1x230V, 50Hz
Current	6	8.4	8.4
Protection class	IPX8	IPX8	IPX8
Fluid temperature (°C)	40	40	40
Max. immersion depth (m)	70	70	70
Insulation class	Class B	Class B	Class B
Pump housing material	stainless steel	stainless steel	stainless steel
Impeller material	POM	POM	POM
Cable	25m Length incl. protective power plug	25m Length incl. protective power plug	25m Length incl. protective power plug
Motor	Ediable oil filled motor	Ediable oil filled motor	Ediable oil filled motor

Article No
P BP340 7204



Article No
P BP340 7205

Article No
P BP340 7211

Different product types available on request.
Contact for the details.

Hydraulic characteristics

Dimensions and Weight

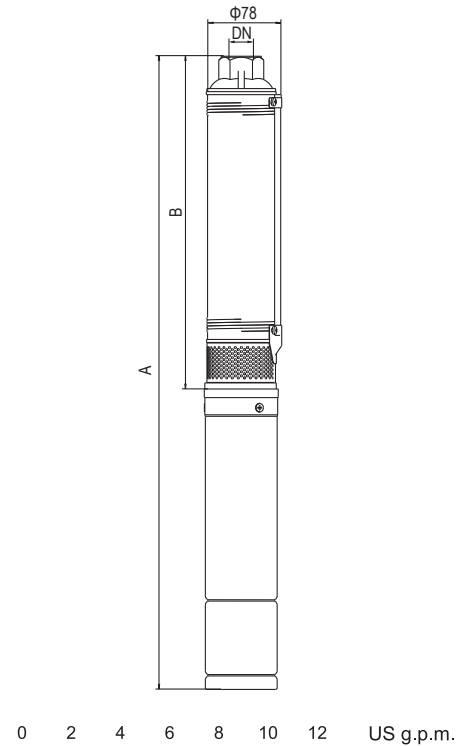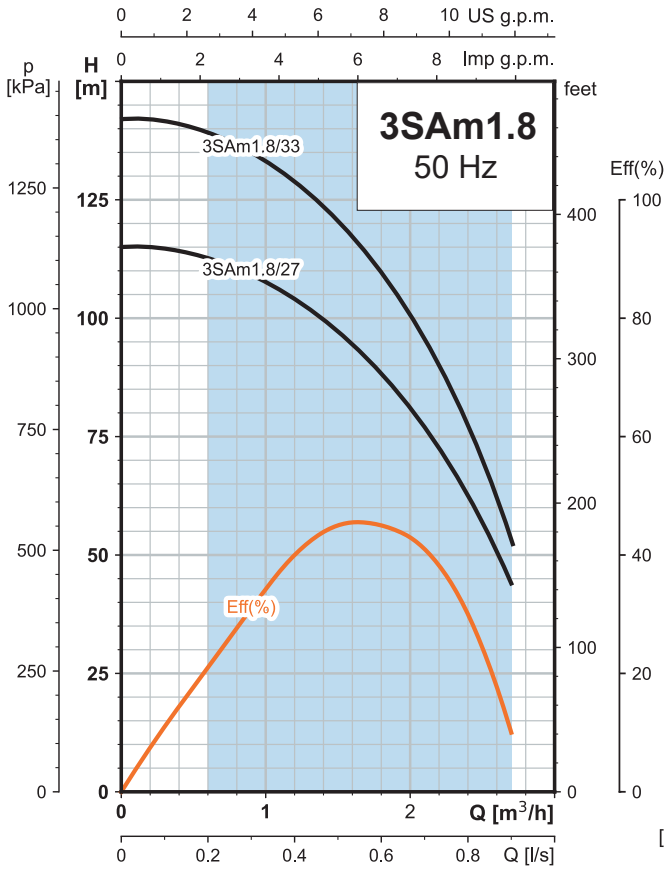

Model	Connections	Dimensions (mm)		Weight (kg)	
		A	B	N.W.	G.W.
3SAm1.8/27	1"	1255	831	12	13
3SAm1.8/33	1"	1475	966	14.5	15.5
3SAm2.5/25	1"	1425	916	13	14

